



TOOLS REQUIRED

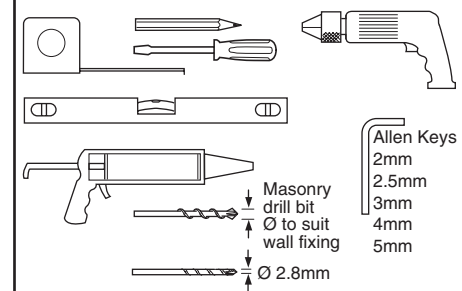


CONTENTS

FIXED PANEL



REF	DESCRIPTION	QTY
A	FIXED PANEL	1
A1	HINGE COVER	2
A2	GRUB SCREW	2
A3	MOUNTING BRACKET COVER	2
A4	ANTI-SLIP SHIM, 3mm, 2mm, 1mm	2 each

BATHSCREEN

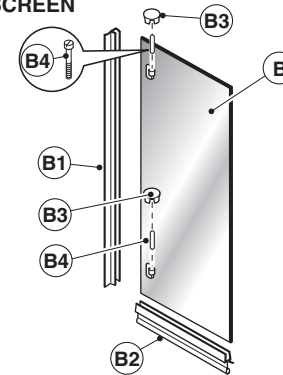

REF	DESCRIPTION	QTY
B	BATHSCREEN PANEL	1
B1	INNER SEAL	1
B2	BOTTOM SEAL	1
B3	HINGE PLUG	2
B4	ANTI-LIFT SCREW	2



FRAMELESS BATHSCREEN

FULL FITTING INSTRUCTIONS

ALL NOMINAL DIMENSIONS IN MILLIMETRES

Please ensure that these instructions are read thoroughly prior to installation. The manufacturer cannot be held responsible for any problems arising from an incorrectly installed product.

Guarantee Terms and Conditions

The Manufacturers policy is one of continuous development and improvement and accordingly we reserve the right to alter specification without prior notice.

The utmost care has been taken in the manufacture of this product to ensure it gives complete satisfaction. To the best of our knowledge this product was in perfect condition when it left our factory. You are recommended to examine it before installation and check quality, accuracy of the components and quantity of the contents. Customers should note that claims for damage to glass, finish or shortages must be submitted to the vendor before installation. The manufacturer also reserves the right to disallow claims once the product has been installed.

Failure to follow the recommendations set out in these instructions or to install in a manner not approved by the manufacturer may result in all or part of the product guarantee being null or void.

This product is guaranteed by the manufacturer for a period of 10 years from the date of purchase and no other proposal or statement by any other party will supersede or complement this offer. Should any part of it become defective due to faulty manufacture or materials, it will be replaced free of charge (supply only). Any parts supplied will have a guarantee term for the remaining period of the initial product guarantee stated previously. The product is not guaranteed against conditions of use or misuse.

This guarantee does not cover glass breakage however caused, or any fault arising from incorrect installation. Any replacement parts supplied, including assemblies, or completed products, are for DIY installation and no claim can be accepted for any costs however incurred for the installation of the replacement items.

This guarantee is offered as an extra benefit and is in addition to and does not affect your statutory rights. Please retain your receipt as proof of purchase.

Prior to installation, carefully unwrap the product; ensuring it is placed on a clean surface to reduce the risk of scratching the finish. Inspect the product for transit damage; all such damage must be reported within 3 days of receipt to the supplier.

INSTALLATION

The following text is to be read in conjunction with the pictorial diagrams.

PREPARATION

Ensure that the walls are tiled and are vertical to the bath.

Make sure that the bath has been installed as per the manufacturer's instructions, that it is level and the joint between the tiles and the bath is sealed with a continuous bead of an appropriate sanitary silicone sealant.

Check that the bath has no protruding features, such as hand grips, that will obstruct the movement of the bathscreen and that the top surface of the bath is flat.

1 FIXED PANEL

Draw a line parallel to the rim of the bath, 19mm in from the inside.

Using a spirit level and a straight edge of suitable length, draw a perpendicular line up the wall from the line on the rim of the bath.

2 Place two of the 3mm anti-slip shims (A2) onto the bath rim, across the line. Check the level across the shims. If the base is not level, it should be levelled using the 1mm and 2mm shims as necessary.

3 Lift the panel (A) into place with the inside edge against the drawn lines and mark through the holes in the brackets onto the wall.

4 Remove the panel, then drill the wall at the pre-marked positions and insert wall fixings applicable to your wall type construction (not supplied).

5 Replace the panel against the pencil lines. There should be a gap of about 2mm between the glass edge and the wall. Place a 2mm thick piece of packing at the top, check that the panel is at right angles to the base then place a packing piece at the bottom. Attach the panel to the wall using screws applicable to your wall fixings.

It is recommended that you apply a small bead of silicone sealant behind the head of each screw before tightening to prevent water ingress.

6 Remove the packing pieces. Check that the panel sits squarely to the base. If necessary adjustment can be made at each mounting bracket by slackening the fixing screws and carefully turning the hexagon head adjusting screws as required, with an allen key. When satisfied with the adjustment, tighten the fixing screws.

Further adjustment is available by slackening the large hexagon head screw in the glass side of the bracket. Check that the panel is sitting level on the anti-slip shims on the base.

7 Place the cover caps (A3) on the mounting brackets. Secure with the grub screws (A2) using a 2mm allen key. Do not place the cover caps (A1) on the hinges at this point.

8 Fit the sealing strip (F) to the bottom of the glass bathscreen panel, making sure that the fin is on the bathside of the glass.

The rear seal (B1) pushes onto the hinge end of the bathscreen with the blade facing the fixed panel.

9 Using a 3mm allen key, slacken the two hexagon headed screws in the top of the screen hinge to allow the plastic insert inside to rotate freely.

10 Lift the bathscreen panel and carefully place the hinges onto the hinges on the fixed panel. It may be necessary to 'jiggle' the bathscreen panel so that the hinges sit correctly in position with one another. There should be no gap at either hinge when in line with the fixed panel (in the closed position).

Tighten the two hexagon head screws and the anti-lift screw in the hinge and check the bathscreen panel operation. When opened either way it should rise on the hinges.

If preferred, the mating faces of the hinges may be coated with a suitable lubricant before assembly. When satisfied with the operation of the bathscreen panel, insert the anti-lift screws (B4) and blanking plugs (B3) in the top of the hinges.

11 Check the bathscreen panel alignment and operation. The bottom of the bathscreen panel glass should be about 18mm above the rim.

Adjustments can be made at the hinges on the fixed panel. If the bathscreen panel is out of line with the fixed panel, slacken the two hexagon head screws in each hinge and re-align the bathscreen panel. Retighten all the adjusting screws.

12 If the bathscreen panel is level but above or below the fixed panel, measure the difference between the two edges then place a piece of tape above or below the hinges on the fixed panel at that distance to be adjusted.

It is recommended that the bathscreen panel is removed for this adjustment. Remove the plug (B3) from each hinge, unscrew the anti-lift screw (b4) and carefully lift the bathscreen panel off.

Slacken the grub screw in the end of the hinge with a 2.5mm allen key. Slacken the hexagon head screw in the centre of the cam with a 5mm allen key. With a flat bladed screwdriver, rotate the cam until the hinge reaches the tape. Holding the cam in position with the screwdriver, tighten the centre screw with the allen key. Tighten the grub screw in the end.

Replace the bathscreen panel as in step 10.

13 When satisfied with the alignment of the bathscreen panel, place the cover caps (A1) onto the hinges.

14 It is important that the bathscreen is sealed properly and carefully to allow any water to flow back INTO the bath at the correct places. All surfaces must be clean and dry before the application of sealant.

Trim the visible ends off the shims (A4) on the inside and outside at the bottom of the fixed panel.

1 Apply a continuous bead of clear silicone sealant from bottom to top between the wall and the fixed panel on both the inside and outside.

2 Apply a continuous bead of clear silicone sealant along the base of the fixed panel from the wall to the end of the panel.

IMPORTANT

Take care to avoid putting silicone sealant on the bottom seal as this may impede the pivoting action of the bathscreen, or may allow water to pass any undulations in the seal surface.

Allow 24 hours for silicone to fully cure before use.

IMPORTANT

Take care to avoid hidden water pipes and electrical cables when drilling into the wall. Seek expert advice on the type of wall fixings applicable to your wall construction and the type of sealant to use in your application.

This bathscreen is suitable for use with gravity fed showers.

Careful consideration should be given when using other types of showers which may cause leakage problems and excessive splashing outside the showering area.

CARE AND ATTENTION

Clean your bathscreen with mild detergent and water promptly after use. This will prevent the build up of limescale.

NEVER use an abrasive or aggressive cleaner.

A proprietary glass cleaner can be used if necessary.

FIXED PANEL

