

Prior to installation, carefully unwrap the product; ensuring it is placed on a clean surface to reduce the risk of scratching the finish. Inspect the product for transit damage; all such damage must be reported within 3 days of receipt to the supplier.

IMPORTANT

Take care to avoid hidden water pipes and electrical cables when drilling into the wall. Seek expert advice on the type of wall fixings applicable to your wall construction and the type of sealant to use in your application.

INSTALLATION

The following text is to be read in conjunction with the pictorial diagrams and the instructions supplied with the PIVOT DOOR. It is recommended that another person is available to assist with holding the assembly in place until the wall posts are fixed in position.

Please note that the screws (L), plastic washers (M), magnetic seal (D) and shorter wall post (B2) with its concealed fixing cover (A2) used in this assembly are those supplied in the door pack.

The item reference letters are as used in the door fitting instructions.

1 Follow the instructions for assembling the door assembly.

Remove any transit packing from the inline panel.

Insert the inline panel post into the shorter wall post from the door pack (B2), then push the second magnetic seal strip (D) from the door pack onto the inline panel, flush with the bottom of the panel. This magnetic strip must be fitted the opposite way round to the first so that the magnets close tightly together along the full height.

2 Cut a 'V' notch in the bottom of the magnetic seal (D) attached to the inline panel, on the inside edge (not necessary for wet room applications). This prevents water from seeping outwards during showering.

3 Select left or right handing opening of the door (C) by turning it on its base through 180 degrees. Ensure that the panel is the correct way up, so that the door rises when opened. When in the closed position (in line with the wall post), there should be a gap between the top hinge components and no gap between the bottom hinge components.

4 TIP - to prevent marking the shower base when moving the enclosure about its surface, tape a layer of paper on top of the base.

Lift the assemblies onto the tray (or into the recess) and position them in line between the walls, with the magnetic seals pushed together, to form the enclosure.

Note:

When used with a shower tray, the enclosure should be positioned on the rim of the tray, set back approximately 10mm from the outside edge.

When used in a wet room, the enclosure may be placed at any preferred position at right angles across the recess.

If necessary, the width of the enclosure can be increased by moving the wall posts outwards from the door assembly, ensuring that there is enough overlap for the fixing screws to secure the wall posts to the door and inline panel assemblies.

Check that the enclosure is in line, sits squarely in the recess and is vertical.

5 When satisfied with the position of the enclosure, draw a pencil line down the back edges of both wall posts (B1, B2), following the instructions for the door.

Note which wall each wall post fixes to.

Remove the enclosure from the recess and separate the wall posts from it.

6 Replace the wall posts against the pencil lines on the wall and mark through the pre-punched holes in the flange and the centre of each one.

7 Remove the wall posts, then drill the wall at the pre-marked positions and insert wall fixings applicable to your wall type construction (not supplied).

8 Attach both wall posts to the wall using screws applicable for your wall fixings. Ensure that the screw heads are not wider than the flange.

It is recommended that you apply a small bead of silicone sealant behind the head of each screw before tightening to prevent water ingress.

9 Follow the door instructions for repositioning it into the recess.

Reposition the inline panel in the recess, ensuring that it is in line between the wall posts. To secure the inline panel to the wall post, drill five holes with a 2.8mm drill bit through the wall post, using the vee groove as a guide, in line with the screws which fasten the wall post to the wall.

Fasten with the five No.6 x 3/8" screws (L) and plastic washers (M) provided in the door pack.

10 It is important that the shower enclosure is sealed properly and carefully to allow any water to flow back INTO the shower enclosure at the correct places. All surfaces must be clean and dry before the application of sealant.

SEALING INSIDE THE ENCLOSURE

1 Apply a continuous bead of clear silicone sealant from bottom to top between the wall posts and the walls.

2 Apply a continuous bead of clear silicone sealant from bottom to top between the wall post and the hinge, and the wall post and the inline panel post.

DO NOT SEAL ALONG THE BOTTOM OF THE INSIDE OF THE FRAME as this will prevent any water draining back into the tray.

SEALING OUTSIDE THE ENCLOSURE

1 Apply a continuous bead of clear silicone sealant from bottom to top between the wall posts and the walls.

2 Apply a continuous bead of clear silicone sealant from bottom to top between the wall post and the hinge, and the wall post and the inline panel post.

3 Apply a continuous bead of clear silicone sealant along the base between the wall and the door glass, and on the inline panel seal the full width of the glass from the wall up to the magnetic seal. Ensure that there are no gaps left where the sealant is applied.

4 If a sealing kit, with straight bar, has been used, follow the instructions provided in the door pack to complete the sealing process.


Allow 24 hours for the silicone sealant to fully cure before use

11 Clip the concealed fixing covers (A1, A2) into position on the wall posts by pushing them firmly over the plastic washers. Take care to match the length of each concealed fixing cover with the length of the wall post.


If it is necessary to remove the concealed fixing covers, carefully insert a screwdriver between the concealed fixing cover and the wall post and gently prise the cover off.

12 A support bracket is supplied to make the enclosure more rigid.


An alternative design to the one illustrated may be supplied, but the fitting procedure will be similar. See back page for fitting instructions.

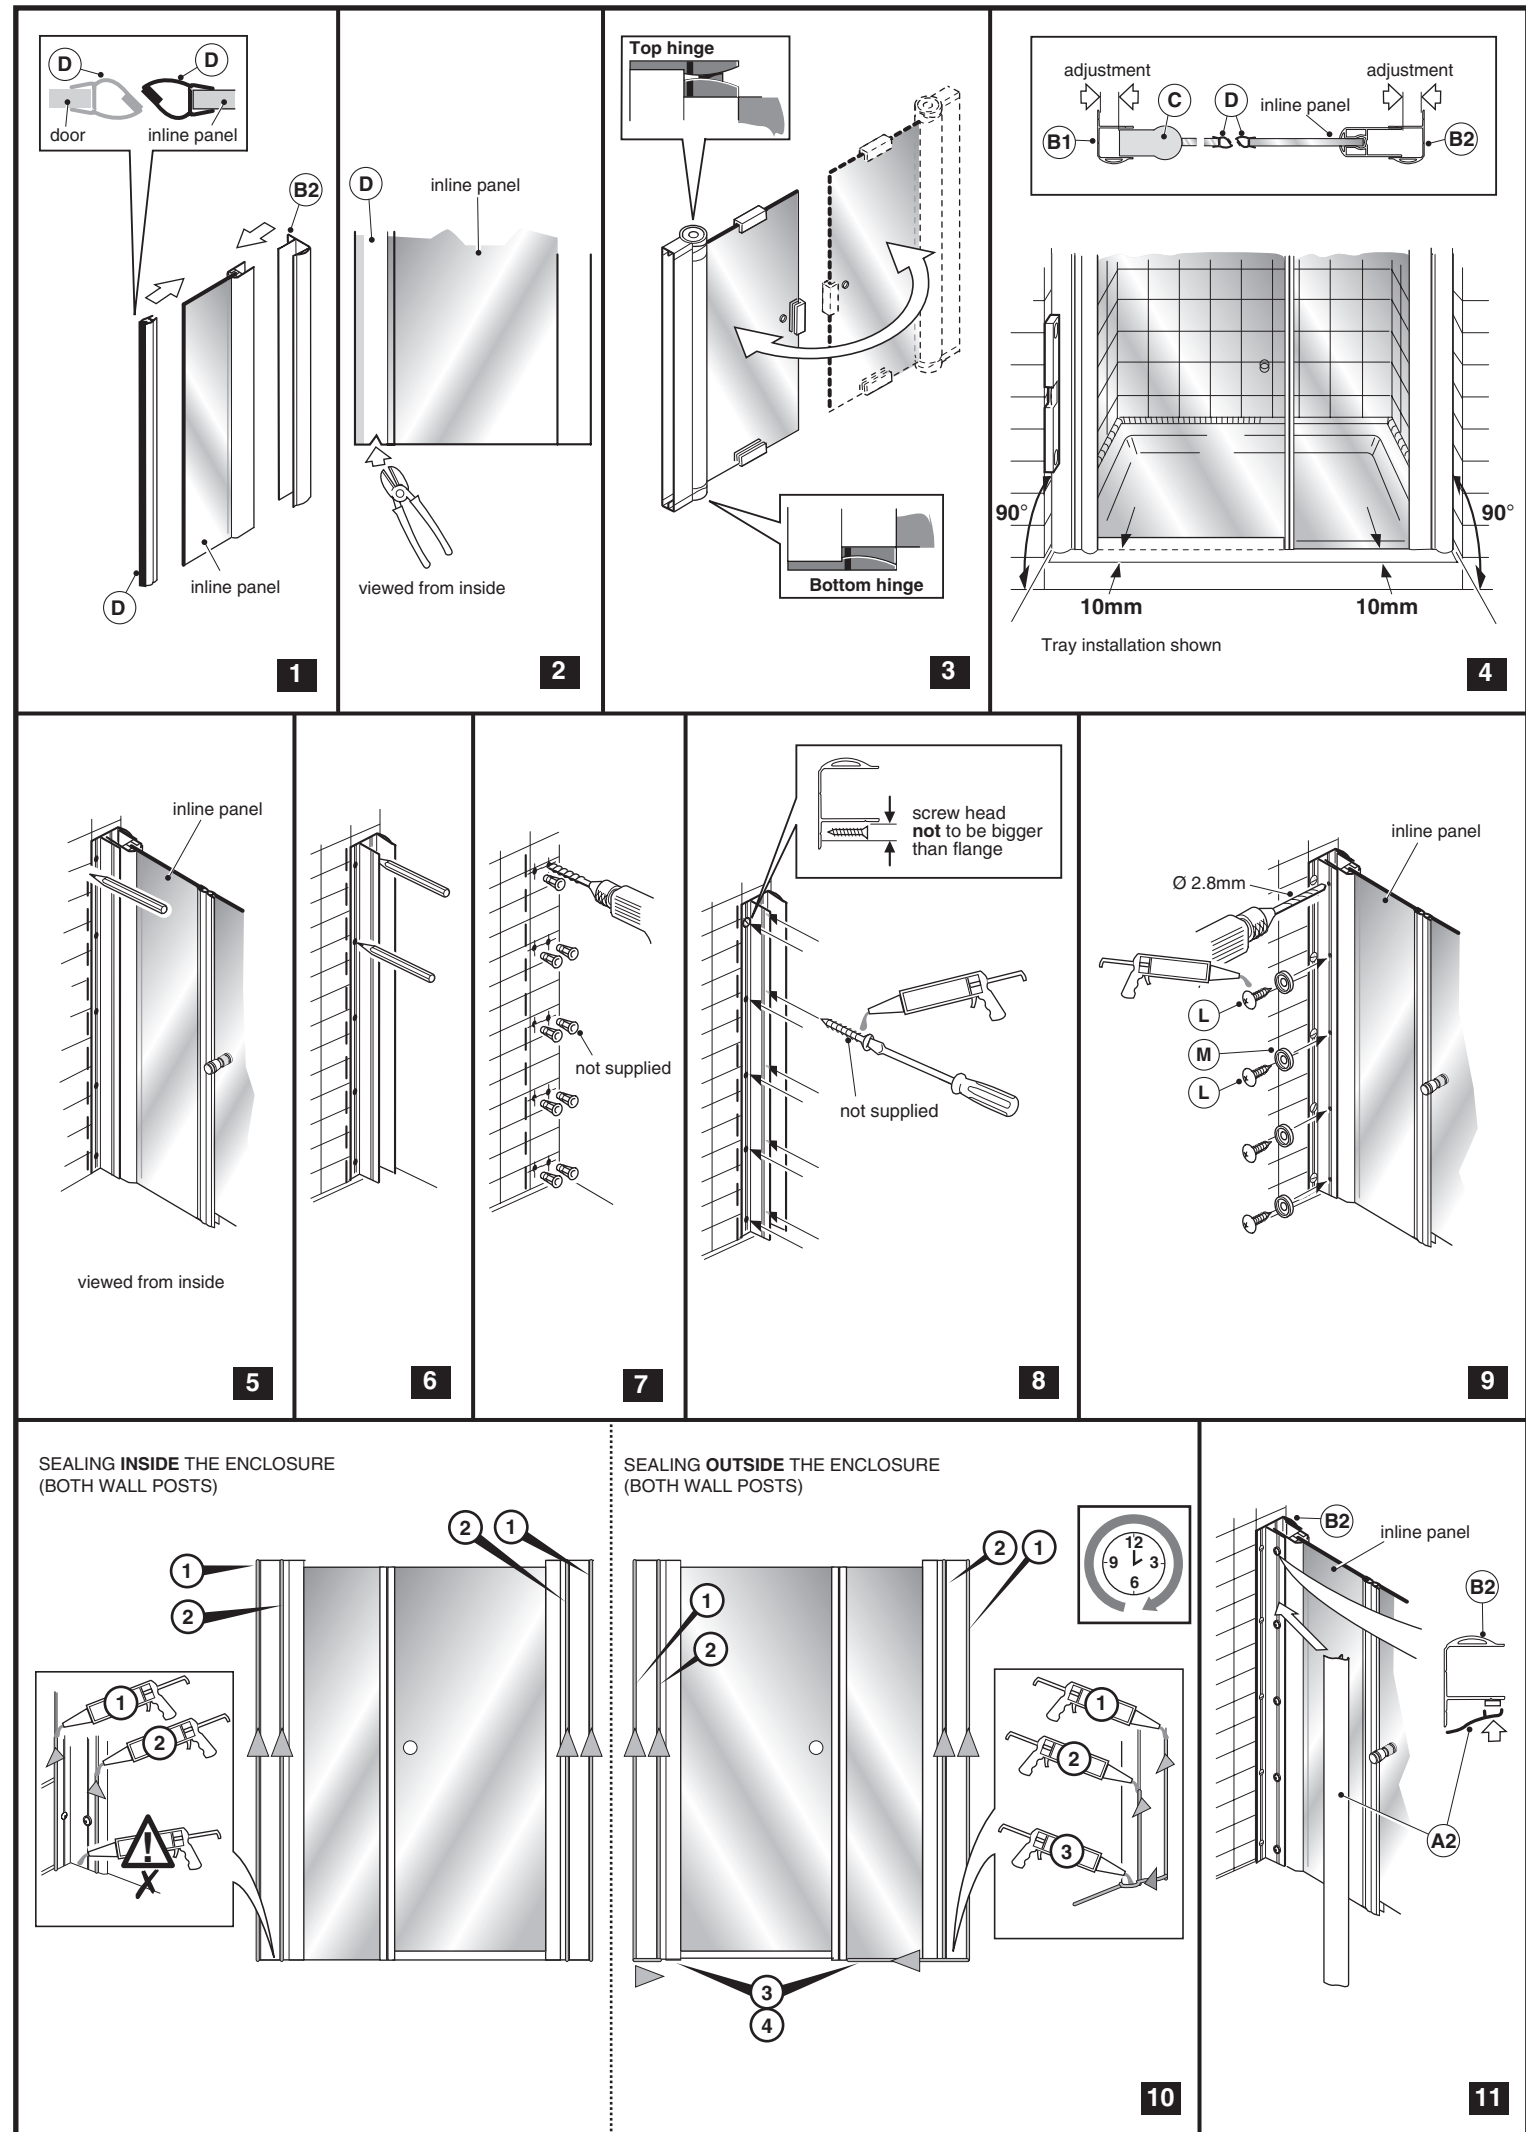


12 - SUPPORT BRACKET




Insert the two plastic grub screws (c) partially into the 'U' bracket (b).

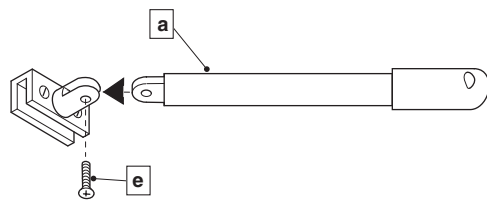


Fasten the swivel joint (d) to the 'U' bracket with screw (e).

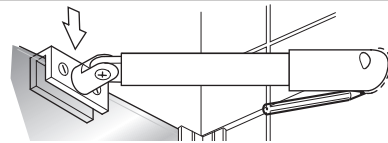


Fit the 'U' bracket over the top of the glass panel and slide it carefully along until the angled joint touches the wall with the bar at approximately 45 degrees between the wall and the panel. When satisfied with the position of the bracket, mark its position on the wall through the hole in the base.




If necessary, the bar may be shortened by cutting it to the desired length with a hacksaw. The angled boss is secured to the bar with a grub screw. Remove the boss and cut the bar. Replace the boss and tighten the grub screw.



Swing the bracket away from the wall and drill through the centre of the marked position. Insert a suitable wall fixing.

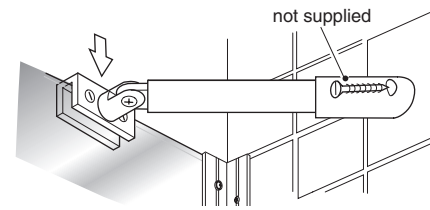

Return the angled joint to the wall and using a screw suitable to the wall fixing, secure it to the wall. Carefully tighten the plastic grub screws in the 'U' bracket onto the glass and tighten the screws in the swivel joints.

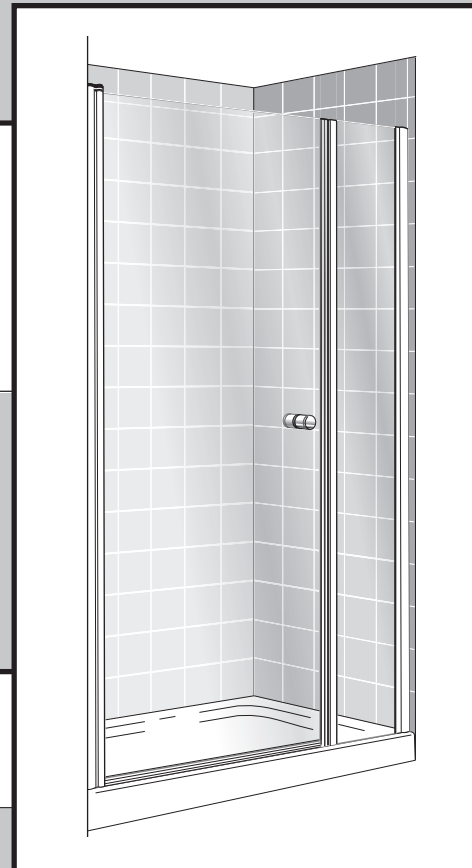

INLINE PANEL

FOR USE WITH RISE AND FALL HINGE PIVOT DOOR

FEATURES

- ADJUSTABLE WALL POST
- APPROVED FOR POWER SHOWERS
- CONCEALED FIXING COVER

FULL FITTING INSTRUCTIONS

FOR INSTALLATION IN A WET ROOM OR WITH A SHOWER TRAY

ALL NOMINAL DIMENSIONS IN MILLIMETRES

CONTENTS

INLINE PANEL PACK


DESCRIPTION	QTY
INLINE PANEL	1

transit packing




ITEMS REQUIRED FROM DOOR PACK

The item reference letters used in the following illustrations are those which are given in the Pivot Door pack, as the items are required in the assembly of the Inline Panel enclosure.

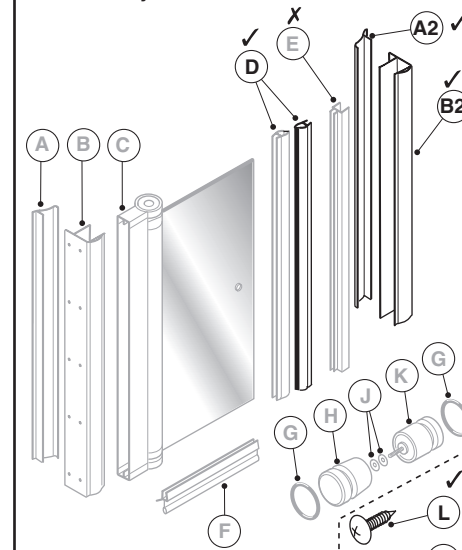


TOOLS REQUIRED

Note: The silicone sealant to be used in the assembly and finish of this shower enclosure should be CLEAR.

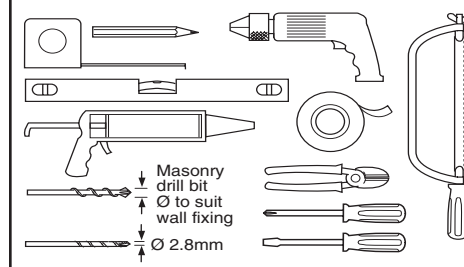

SUPPORT BRACKET

An alternative design of bracket may be supplied but the fitting method will be similar



REF	DESCRIPTION	QTY
a	SUPPORT BRACKET ARM	1
b	'U' BRACKET	1
c	GRUB SCREW plastic	2
d	SWIVEL JOINT	1
e	FIXING SCREW	2

Guarantee Terms and Conditions

The Manufacturers policy is one of continuous development and improvement and accordingly we reserve the right to alter specification without prior notice.

The utmost care has been taken in the manufacture of this product to ensure it gives complete satisfaction. To the best of our knowledge this product was in perfect condition when it left our factory. You are recommended to examine it before installation and check quality, accuracy of the components and quantity of the contents. Customers should note that claims for damage to glass, finish or shortages must be submitted to the vendor before installation. The manufacturer also reserves the right to disallow claims once the product has been installed.

Failure to follow the recommendations set out in these instructions or to install in a manner not approved by the manufacturer may result in all or part of the product guarantee being null or void.

This product is guaranteed by the manufacturer for a period of 10 years from the date of purchase and no other proposal or statement by any other party will supersede or complement this offer. Should any part of it become defective due to faulty manufacture or materials, it will be replaced free of charge (supply only). Any parts supplied will have a guarantee term for the remaining period of the initial product guarantee stated previously. The product is not guaranteed against conditions of use or misuse.

This guarantee does not cover glass breakage however caused, or any fault arising from incorrect installation. Any replacement parts supplied, including assemblies, or completed products, are for DIY installation and no claim can be accepted for any costs however incurred for the installation of the replacement items.

This guarantee is offered as an extra benefit and is in addition to and does not affect your statutory rights. Please retain your receipt as proof of purchase.

CARE AND ATTENTION

Clean your enclosure with mild detergent and water promptly after use. This will prevent the build up of limescale.

NEVER use an abrasive or aggressive cleaner.
A proprietary glass cleaner can be used if necessary.